

APPLICATIONS AND ADVANTAGES:

APPLICATIONS


Naptex® 100 is a non-woven geotextile, produced by the method of needle punching, partially thermally hardened, made 100% from polypropylene. Owing to its properties, Naptex® 100 characterizes in multifunctionality and has a wide range of applications, mostly for separation, filtration, reinforcement and stabilization of the ground.





ADVANTAGES

- reinforces the substructure and ensures stability of roads, pavements, drives and car parks
- used under paving stones and slabs For stabilization of the ground with maintained water filtration
- protects the drain, filtrates the water and separates the aggregate around the draining pipe
- in perimeter drainage of foundations, protects the insulation from damage, and the drainage system from clogging
- separates the thermoinsulation layer from the gravel backfilling,
 at the same time stabilizing the terrace and roof flooring

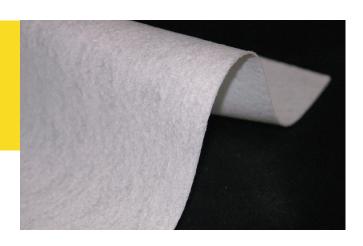

| TECHNICAL DATA | |
|--|-----------------|
| Weight | 90-110 g/m² |
| Material | polypropylene |
| Breaking strength (EN ISO 103019) | 7,2 / 7,4 kN/m² |
| Dynamic breakdown strength (EN 13433) | 30 mm |
| Static breakdown strength (CBR test) (EN ISO 12236) | 1,1 kN |
| Filtration opening (EN ISO 12956) | 175 μm |
| Water flow speed index (EN ISO 11058) | 0,11 m / s |

CHEMICAL RESISTANCE

It is resistant to chemical substances, fungi, roots and bacteria present in the ground. It is completely neutral to the natural environment.

